


AR150-7500 .../...



## Cable set

### Standard cable sets:

- galvanized steel cable
- lay method: right crosslay
- one pointed and one thimble and talurit end
- supplied with safety sling hook with latch
- other specifications are available on demand
- in compliance with EN 12383-4 and EN 13157

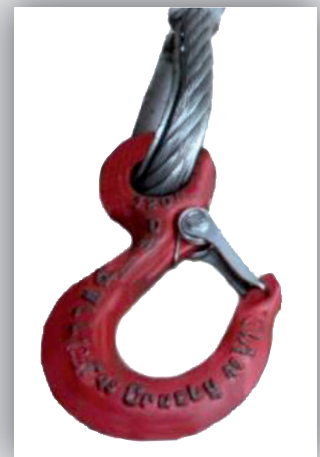

**GEBUWIN**  
metal products

Industrieweg 6 7102 DZ Winterswijk The Netherlands  
T +31 (0)543 532600 F +31 (0)543 532601  
info@gebuwin.com www.gebuwin.com

## Technical specifications AR150-7500 .../...

Type	Diameter cable	Length	Min. breaking load	Pulling force	Hook grade
AR150 D4 / L15	4 (mm)	15 (m)	9 (kN)	1770 (N/mm <sup>2</sup> )	4
AR600 D6 / L12	6 (mm)	12 (m)	17 (kN)	1770 (N/mm <sup>2</sup> )	4
AR1000 D8 / L15	8 (mm)	15 (m)	34 (kN)	1770 (N/mm <sup>2</sup> )	8
AR1500 D10 / L15	10 (mm)	15 (m)	51 (kN)	1770 (N/mm <sup>2</sup> )	8
AR2000 D11 / L15	11 (mm)	15 (m)	63 (kN)	1770 (N/mm <sup>2</sup> )	8
AR3000 D14 / L15	14 (mm)	15 (m)	102 (kN)	1770 (N/mm <sup>2</sup> )	8
AR4000 D16 / L15	16 (mm)	15 (m)	133 (kN)	1770 (N/mm <sup>2</sup> )	8
AR5000 D18 / L15	18 (mm)	15 (m)	168 (kN)	1770 (N/mm <sup>2</sup> )	8
AR7500 D22 / L15	22 (mm)	15 (m)	251 (kN)	1770 (N/mm <sup>2</sup> )	8

subject to changes

[www.gebuwin.com](http://www.gebuwin.com)